

Secura[®]



Beyond the limits safely

A **Unitex Group** Brand

INTRODUCTION

SECURA is the brand name under which are developed and distributed safety products dedicated to working at height. With over 100 years of experience in textiles, UNITEX Group has established an excellent reputation in the industry and particularly the automotive, aeronautics and lifting equipment. This sector represents a large part of the Group's business and turnover.

With nearly fifteen years experience in prevention and safety systems field and expertise that is well established, UNITEX Group , with its R&D department, to design and manufacture its own products with perfect mastery of the various steps of production, from raw material to finished product. This feature allows the Group to adjust its production in accordance to the market demand and the end user requirements.

SECURA is guaranteed a wide choice of high quality safety products meeting the highest standards in height safety prevention.

SECURA is the UNITEX Group safety equipments brand name

The UNITEX Group is the world's leading complementary solutions for lifting, handling and safety, to meet the needs of security, protection and comfort for end user.

TABLE OF CONTENT

HARNESSES	P. 4-5
LANYARDS	P. 6
WORK POSITIONING ANCHORAGE	P. 7
CONNECTORS / KARABINERS	P. 8
FALL ARREST BLOCKS	P. 9
HEIGHT SAFETY KITS	P. 10-11
FALL ARREST DEVICES	P. 12
CONFINED ACCESS / RESCUE EVACUATION	P. 13
UNITEX GROUP IN THE WORLD	P. 14-15

FULL-BODY HARNESSSES



MULTI ATTACHMENT POINTS

EASY FITTING



ALUMINIUM FAST BUCKLES



SEK31 - COMFORT LEG PAD

Set of leg-pads for extra comfort during long term work, delivered in pairs and can easily be fitted on each harness



SEK42 - SUSPENSION TRAUMA STRAPS

Can be used to support the lower part of the body after a fall has taken place, to avoid suspension trauma, need to be strapped on the harness before use, delivered in pairs



SEH16 MULTI-TASK COMFORT HARNESS

full-body harness specially designed for long term work at height where next to safety a higher comfort is also important, c/w front and rear attachment for fall-arrest and 2 work positioning rings (2 at the side) 1 suspension point, easy adjustable, extra comfort pads for the waist and the legs, leg straps fitted with fast buckles for easy put-on procedure.

EN-standard: EN361/358/813
Weight: 2,05kg
Size: S/M/L(adjustable), XL on request



RIP-STITCH INDICATORS



SEH4 - WORKER COMFORT HARNESS

full-body harness with front and rear attachment for fall-arrest, c/w belt with 2 attachment rings for work positioning, for extra comfort and a wider usage.

EN-standard : EN361/358
Weight : 1,90kg
Size : S/M/L(adjustable), XL on request

FULL-BODY HARNESSSES



SEH1 - BASIC HARNESS

full-body harness with rear attachment for fall-arrest, easy and precise adjustable, for all basic work at height.

EN-standard : EN361 - SS528 part 1
Weight : 1,05kg
Size : S/M/L(adjustable), XL on request



SEH2 - WORKER HARNESS*

full-body harness with front and rear attachment for fall-arrest, easy and precise adjustable, for a broader usage at height or depth.

EN-standard : EN361 - SS528 part 1
Weight : 1,20kg
Size : S/M/L(adjustable), XL on request



SEH43 - COMFORT-PAD

Back and shoulder piece for extra comfort and support during long term work, gives also a more easier and faster harness put-on procedure, new velcro version can easily be fitted on each harness.



SEH5 - WORKER RESCUE HARNESS

full-body harness with front and rear attachment for fall-arrest and extra rescue strap for confined space ascent, descent and rescue (in cooperation with tripod/winch as mentioned on page 13).

EN-standard : EN361
Weight : 1,25kg
Size : S/M/L(adjustable), XL on request



SEH12 - WORKER FAST HARNESS

full-body harness with front and rear attachment for fall-arrest, higher comfort because of the sit-piece, easy adjustable, c/w fast buckles on the leg parts and the waist belt, specially designed for sustained / wider purposes

EN-standard : EN361
Weight : 1,60kg
Size : S/M/L(adjustable), XL on request



SEH35 - LADY HARNESS

Our new harness is specially designed for ladies. This harness is manufactured with a high chest "V" and centre strap which fits comfortably between the breasts to limit any possible damage to the breast tissue in the event of a fall.

EN-standard : EN361
Weight : 1,30kg
Size : S/M/L(adjustable), XL on request

SAFETY LANYARDS

SEL20/L/K17/K11

KINETIC LANYARD

Special web lanyard (kinetic, built-in shock absorber), complete with an double action hook at one side and a scaffold hook at the other side
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : Yellow



SEL8/L/K1/2XK11

ROPE Y-LANYARD

Rope Y-lanyard (kernmantel rope) with shock absorber, complete with screwgate karabiner at one side and an scaffold hook at the end of each leg.
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : white/red

SEL2/L/K1/K11

ROPE LANYARD

Rope lanyard (kernmantel rope) with shock absorber and screwgate karabiner at one side and a scaffold hook at the other side
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : white/red



SEL3/L/K1/2XK11

WEB Y LANYARD

Complete with screwgate karabiner at one side and a scaffold hook at the end of each leg
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : Yellow

SEL1/L/K1/K1

WEB LANYARD

complete with screwgate karabiner at both sides, also on request available with scaffold hook at one side (SGL1/L/K1/K11)
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : Yellow



SEL9/L/K10/2XK11

ELASTICATED Y LANYARD

Elasticated lanyard with shock absorber and hook at one side and a scaffold hook at the end of each leg, when not suspended fits close to the body, 2-colour legs for extra safety
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)

SEL6/L/K10/K11

ELASTICATED LANYARD

Elasticated lanyard with shock absorber and hook at one side and an scaffold hook at the other side, when not suspended fits close to the body
 EN-standard : EN354 / EN355
 Length : 1,3m / 1,8m (L)
 Colour : Black

WORK POSITIONING ANCHORAGE



SEP1 ROPE POSITIONING POLE STRAP

Work positioning pole strap complete with double action hook and rope grab with screwgate karabiner, to be used for work positioning at different situations and area

EN-standard : EN358
Lenght : 2m



SEL12/L/2XK1 RESTRAINT LANYARD

Adjustable restraint lanyard for use outside a fall area or to prevent to go into a fall area, for instance to secure inside a working platform or skylift, both sides supplied with screwgate Karabiner

EN-standard : EN354
Lenght : 0,75m up to 1,5m (IPAF)
or 1m up to 2m (L)



SEP4 WIRE POSITIONING POLE STRAP

Work positioning pole strap complete with double action hook and rope grab with screwgate karabiner, to be used for work positioning at different situations and area, because of the steel core especially good for work-positioning with chainsaw (arborist sector).

EN-standard : EN358
Lenght : 3m



SEK26L GIRDER SLING

Polyester girder sling to create a temporary anchor point at a structure for the connection of a safety lanyard or fall-arrest device, extremely flexible, robust, light weight and durable

EN-standard : EN795 Class B
Lenght : 1m / 2m / 3m (L)



SEBT1 BEAM TROLLEY

Adjustable steel beam trolley to create a temporary anchor point for fall-arrest on a steel beam.

EN-standard : EN795
Flange size : 75-200mm (adjustable)



SEHL1/L TEMPORARY HORIZONTAL LIFELINE

Temporary horizontal web lifeline c/w with tightening system, easy & safely usable when connected to the right anchor points, for 2 persons maximum.

EN-standard : EN795 Class C
Lenght : 10m/20m
Standard version : supplied with 2x SEK3 steel karabiners and 2x SEK26/1 girder sling, in nylon bag

CONNECTORS / KARABINERS



SEK1
SCREW GATE KARABINER
Steel screwgate karabiner.
Size : 108 x 58 mm
EN-standard : EN362
Min. breaking strength : 22kN



SEK3
BOA TWIST LOCK KARABINER
Steel boa twistlock karabiner
Size : 125 x 90 mm
EN-standard : EN362
Min. breaking strength : 40kN



SEK2
TWIST LOCK KARABINER
Steel twistlock karabiner.
Size : 108 x 58 mm
EN-standard : EN362
Min. breaking strength : 23kN



SEK4
ALU TWIST LOCK KARABINER
Aluminium boa twistlock karabiner.
Size : 125 x 90 mm
EN-standard : EN362
Min. breaking strength : 25kN



SEK6
BOA TWIST LOCK KARABINER
Aluminium boa twistlock karabiner.
Size : 235 x 130 mm
EN-standard : EN362
Min. breaking strength : 23kN



SEK5
ALU BOA TWIST LOCK KARABINER
Aluminium boa twistlock karabiner.
Size : 235 x 130 mm
EN-standard : EN362
Min. breaking strength : 35kN



SEK11
AUTO SCAFFOLD HOOK
Aluminium scaffold hook.
Size : 255 x 112 mm
EN-standard : EN362
Min. breaking strength : 20kN

SEK7 / SEK8
SELF SPRING KARABINER
Stainless steel self spring karabiner.

Size : 400/400 mm x 175/200 mm
EN-standard : EN362
Min. breaking strength : 22kN



FALL ARREST DEVICES



SEA1 MINI WEB BLOCK

The standard version of the mini fall arresters, light and compact with built-in web shock absorber, on request available with scaffold hook underneath.

EN-standard : EN360
Length : 2,5m web

Standard version : Complete with 2 steel screwgate karabiners

Weight : 1,4kg



SWB10 FALL-ARREST BLOCK

Unique Retractable Block also available in High-Tensity Webbing, which makes the Block lighter in weight and more handy in use. Best suited for use in areas of Electrical Hazards.

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 10m web
Weight : 5,75kg



SCB05 FALL-ARREST BLOCK

Casing made up of high impact strength Polymer, to prevent breakage and is nearly indestructible.

Comes with Galvanized Steel Wire Rope of dia 4.5 mm

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 5m wire rope
Weight : 3,9kg



SWB05 FALL-ARREST BLOCK

Unique Retractable Block also available in High-Tensity Webbing, which makes the Block lighter in weight and more handy in use. Best suited for use in areas of Electrical Hazards.

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 5m web
Weight : 3,25kg



SCB10 FALL-ARREST BLOCK

Casing made up of high impact strength Polymer, to prevent breakage and is nearly indestructible.

Comes with Galvanized Steel Wire Rope of dia 4.5 mm

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 10m wire rope
Weight : 4,6kg



SCB15 FALL-ARREST BLOCK

Casing made up of high impact strength Polymer, to prevent breakage and is nearly indestructible.

Comes with Galvanized Steel Wire Rope of dia 4.5 mm

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 15m wire rope
Weight : 6,4Kg

SCB18 FALL-ARREST BLOCK

Casing made up of high impact strength Polymer, to prevent breakage and is nearly indestructible.

Comes with Galvanized Steel Wire Rope of dia 4.5 mm

Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

EN-standard : EN360
Length : 18m wire rope
Weight : 6,7Kg



HEIGHT SAFETY KITS



SEHK1/C/K1 BASIC KIT

Standard kit for general industrial use, supplied in hard case

EN-standard : EN 361 / EN 354 / EN355

Standard version : SEH2 harness & SEL1/1.8m web lanyard with shock absorber and screwgate karabiners + case



SEHK2/C/K1 - SEHK4/C/K1 SCAFFOLD KIT

Standard kit for the construction-sector with web lanyard (SEHK2) or web Y-lanyard (SEHK4, scaffolding), supplied in hard case

EN-standard : EN 361 / EN 354 / EN355

Standard version : SEH2 harness & SEL1/1.8m lanyard / SEL3/1.8m Y-lanyard c/w karabiner and automatic scaffold hooks + case



HEIGHT SAFETY KITS




SEHK3/C/K1 PREMIER KIT

The premier kit is designed for different use / purpose and is supplied with the right items to cover height safety within certain industrial / construction sectors.

EN-standard : EN361 / EN 360 / EN354 / EN355 / EN795 Class B

Standard version : SEH2 harness / SEL1/1.8m lanyard with karabiner and scaffold hook / SEA1 mini fall-arrest block / SEK26/1 girder sling + case.

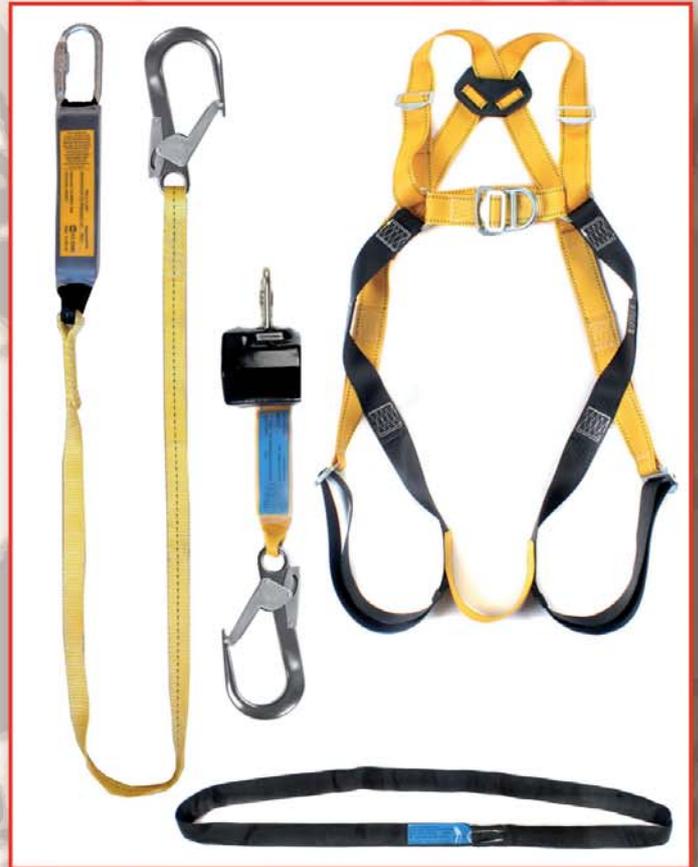

SEHK5/IPAF/C/K1 IPAF KIT

Together with IPAF (the organisation covering the work platform & skylift industry) we designed a complete kit with a harness and a restraint lanyard (without shock absorber) to work safely at height.

EN-standard : EN 361 / EN 354 / EN355

Standard version : SEH2 harness & SEL1/1.8m lanyard / SEL3/1.8m Y-lanyard c/w karabiner and automatic scaffold hooks + case.



FALL ARREST DEVICES



SEA10R NYLON ROPE

16mm nylon rope.
Spliced at one end.
EN-standard : EN352/2
Available in : 10, 20, 30m



SEA12R KERNMANTEL ROPE

11mm KERNMANTEL rope.
Spliced at one end.
EN-standard : EN352/2
Available in : 10, 20, 30m



SEA16R NYLON ROPE

16mm nylon rope.
Supplied with Splice both end.
EN-standard : EN353/2
Available in : 10, 20, 30m



SEA10 STEEL ROPE GRAB

For 16mm rope.
EN-standard : EN353/2

SEA11 WIRE ROPE GRAB

For 16mm rope.
EN-standard : EN353/2



SEA14 ROCKER ROPE GRAB

Rocker rope grab to be used with
10.5-12.7mm kernmantel rope.
EN-standard : EN353/2



SER TRI-PULLEY BLOCK

Tri-pulley block to be used
with SR1 tripod.
EN-standard : EN12278



SEA10 STEEL ROPE GRAB

For 16mm rope.
EN-standard : EN353/2



SEA12 KERNMANTEL ROPE GRAB

For 11mm kernmantel rope.
EN-standard : EN353/2

CONFINED ACCESS RESCUE / EVACUATION



SER1 ALUMINIUM TRIPOD

GENERAL FEATURES

- Adjustable height 1.25 m to 2.25 m from ground level.
- Adjustment achieved by sliding Aluminium telescopic legs (Inner & outer).
- Outer 44mm x 44mm (wall thickness 2.4mm) Inner 37.5mm x 37.5mm (wall thickness 3.0mm). Maximum dia when fully opened up is 1.5 mtr.
- Securely connected two Aluminium Alloy eye bolts for overhead anchorage, with strength greater than 10 kN • Weight - 13 Kg.
- Every Tripod is also provided with inbuilt fixture for attaching SECURA -Winch SEW1 (Can be supplied without this fixture on special request).
- Also available on request- Tripod with maximum height of upto 3.65 m.
- EN-standard : EN795 CLASS B

SEW1 WINCH

GENERAL FEATURES

- Equipped with Advanced Dual Load Advantage (DLA) Gear System within to give an effortless use of the Winch.
- Incorporated with bolting fixture for robust fitting on the Tripod
- Having lifting load capacity of 125 kgs.
- Provided with Galvanized Steel Cable of 5.0mm dia. length 20m.
- Equipped with Steel Screw Locking Karabiner as Connector on the termination end.
- To be used with a Retractable Fall Arrester when deployed for raising or lowering a person.
- Can also be fitted to SECURA Tripod SER1
- EN-standard : EN 1496 CLASS A



SEH6 - RESCUE TRIANGLE

Rescue triangle for a quick, easy and safe rescue of persons from height/depth.

Standard version : One size fits all, we also have other equipment for rescue and evacuation on request available, contact us for more information



SER3/L VRS - RESCUE SYSTEM

Complete rescue-system for safe and controlled descent of a fallen person, supplied with telescopic-pole, for 1 person only.

Standard version : 20m / 30m / 60m / 100m descent height (L) mation



SER4/L - RESCUE SYSTEM

Complete rescue-system for safe and controlled descent of the rescuer and the victim together, for 2 person use.

Standard version : 20m / 30m / 60m / 100m descent height (L)

THE UNITEX GROUP...

SECURA is the UNITEX Group safety equipments trademark.

RidgeGear Ltd

Marling Mills | Nelson street | Leek
Staffs, ST13 6BB
United Kingdom
Tel : +44 (0)1538 392 616
Fax : +44 (0)1538 387 350

Technotex Industrial Supply

Printer 22 | 7741 MD Coevorden
Postbus 309 | 7740 AH Coevorden
Nederland
Tel : + 31 524 515 114
Fax : + 31 524 511 935

Levac S.A.S.

12 Avenue Lionel TERRAY
69330 MEYZIEU
France
Tel : + 33 0 4 7869 1505
Fax : + 33 0 4 7861 7733

Unitex Neva (Russia)

ООО "Юнитекс Нева"
Россия, Санкт-Петербург
Тел : +7 921 580 90 87
Факс : +7 812 554 14 32

Marling Leek Ltd

Marling Mills | Nelson street | Leek
Staffs, ST13 6BB
United Kingdom
Tel : +44 (0)1538 384 108
Fax : +44 (0)1538 387 350

UNIFIXX B.V

Worldwide Headquarters
Glashorst 111 | 3925 BR Scherpenzeel
Nederland
Tel : + 31 33 2776600
Fax : + 31 33 2776626

C&S Valkenburg & Co BV

Industrial Webbing
Nederland
Tel : + 31 332 776 600
Fax : + 31 332 776 641

Top Slings

18, Lorong Bendahara 38, Di Jalan
Sungai Jati, Taman Seri Indah,
41200 Klang , Selangor, Malaysia
Tel : + 603 5162 3096
Fax : + 603 5162 3094

Tecnobelt Siten srl

Industrial Webbing
Viale Fasano, 14 | Chieri 10023 | (TO)
Italia
Tel : + 39 011 9472527
Fax : + 39 011 9422005

Miller Weblift Ltd

Marling Mills | Nelson street | Leek
Staffs, ST13 6BB
United Kingdom
Tel : +44 (0)1538 384 108
Fax : +44 (0)1538 387 350

...IN THE WORLD

The UNITEX Group is the world's leading complementary solutions for lifting, handling and safety, to meet the needs of safety, protection and comfort for end user.

FRT Manufacturing & Trading Co
627 Aljunied Road #04-01 Pacific Building
SINGAPORE 389837
Tel : + 65 67433652
Fax : +65 67433230

SEIL BAUR GmbH
Derchinger Strasse 126
D-86165 AUGSBURG
Germany
Tel : + 49 821 720 70-0
Fax : + 49 821 720 70-42

**Unitex Safety Equipment
(Kunshan)**
351# Nan Band Rd.
Kunshan City | Jiangsu Province
China
Tel : +86 512 5771 3688
Fax : +86 512 5771 3168

Unitex Group USA
Unitex Group USA, LLC
104 Hurricane Creek Rd.
P.O. Box 455
Piedmont, SC 29673 | USA
Tel : + 1 864 864 8686
Fax : + 1 864 864 8701

Zepf GmbH & Co
Bad Oeynhausen
Germany
Tel : + 49 05731 5305-0
Fax : + 49 05731 5305-40

Klöpfer GmbH
Ulmer Strasse 231 - 70327 Stuttgart
Germany
Tel : + 49 0711 4204713
Fax : + 49 0711 4204715

Unitex Spain SL / Tenso
Ctra. BP-2151 km 18, 08776 Sant
Pere de Riudebitlles (Barcelona)
Spain
Tel : + 34 93 899 62 10
Fax : + 34 93 899 62 09

Lübbe
PO BOX 29 02 13
Am Lunedeich Bremerhaven
D-27532 - Germany
Tel : + 49 0471 96 29 0
Fax : + 49 0471 96 12 00 3

LHS
Flugplatzstrasse F2 Nr. 6
15344 Strausberg - Germany
Tel : + 49 03341 30 73 18
Fax : + 49 03341 30 73 54

Secura[®]



DISTRIBUTOR / DEALER :

Unitex Group